



LOCATION

Rotterdam, NY

TYPE

Pedestrian Bridge

COMPLETION DATE

2019

SPAN

50' - 0 x 6' - 0

DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), and 35 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 2 ½"

Straight Ends

A307 Galvanized Bolts

Cambered On Site

PROForms® Fire Retardant Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at bedfordreinforced.com or call **800-377-3280**.



LOCATION

Cascade Locks, OR

TYPE

Pedestrian Bridge

COMPLETION DATE

2017

SPAN

40' - 0 x 3' - 0

DESIGN SPECIFICATIONS

Design Load - 90 psf (pedestrian), 50 psf (snow), and 20 psf (wind)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 9"

Straight Ends

A36 Galvanized Bolts

Pre-Cambered

PROForms® Standard Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets

Western Red Cedar Decking

Shipped Fully Assembled



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at bedfordreinforced.com or call **800-377-3280**.



LOCATION

Charlotte, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2017

SPAN

40' - 0 x 8' - 0

DESIGN SPECIFICATIONS

Design Load - 100 psf (pedestrian) and 20 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4" Straight Ends

A36 Galvanized Bolts

Cambered On SitePROForms® Standard Polyester Resin System (Olive Green)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at bedfordreinforced.com or call **800-377-3280**.



LOCATION

Banner Elk, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2016

SPAN

60' - 0 x 5' - 0

DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), 35 psf (snow), and 25 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4"

Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Fire Retardant Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking


Truss Sections Shipped Assembled

Other Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at bedfordreinforced.com or call **800-377-3280**.

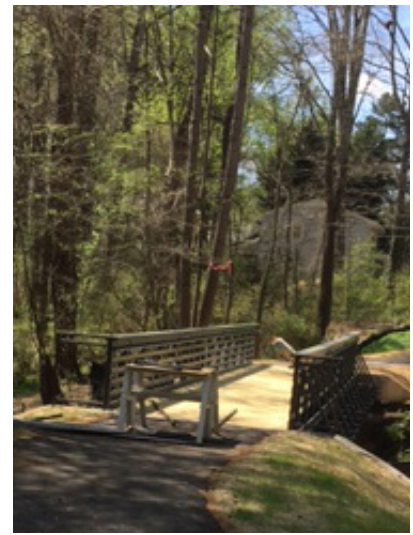

LOCATION

Charlotte, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2016

SPAN

50' - 0 x 8' - 0

DESIGN SPECIFICATIONS

Design Load - 100 psf (pedestrian) and 20 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4"

Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Standard Polyester Resin System (Olive Green)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at bedfordreinforced.com or call **800-377-3280**.



LOCATION

Cumberland Valley TWP, PA

TYPE

Gangway

COMPLETION DATE

2012

SPAN

40' x 4'

DESIGN SPECIFICATIONS

Total Load – 40 psf

Fiberglass Truss

Handrail 48" Above Decking

Straight Ends

A36 Galvanized Bolts

PROForms® Standard Polyester Resin System (Beige)

Galvanized Steel Mounting Brackets

PROForms® FRP Decking

Shipped Fully Assembled



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at bedfordreinforced.com or call **800-377-3280**.