



# READYSPAN

## LOCATION

Martin Hill - Buchanan State Forest, Bedford County, PA

## TYPE

Pedestrian Bridge

## COMPLETION DATE

2020

## SPAN

30' - 0 x 6' - 0

## DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), 30 psf (snow), UTV (7,600lb per UTV, 3 total),

Equestrian 2,000lb per Horse, 5 total)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 3 9/16"

Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [readyspan.com](https://www.readyspan.com) or call 814-623-8125.



# READYSPAN

## LOCATION

Martin Hill - Buchanan State Forest, Bedford County, PA

## TYPE

Pedestrian Bridge

## COMPLETION DATE

2020

## SPAN

26' - 0 x 6' - 0

## DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), 30 psf (snow), UTV (7,600lb per UTV, 3 total),

Equestrian 2,000lb per Horse, 5 total)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 3 9/16"

Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [readyspan.com](http://readyspan.com) or call **814-623-8125**.

READYSPAN





# READYSPAN

## LOCATION

Forest District 13 - Elk State Forest, Emporium, PA

## TYPE

Pedestrian Bridge

## COMPLETION DATE

2019

## SPAN

40' - 0 x 4' - 0

## DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 3 9/16"

Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets

Southern Yellow Pine Decking


All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [readyspan.com](http://readyspan.com) or call **814-623-8125**.

READYSPAN

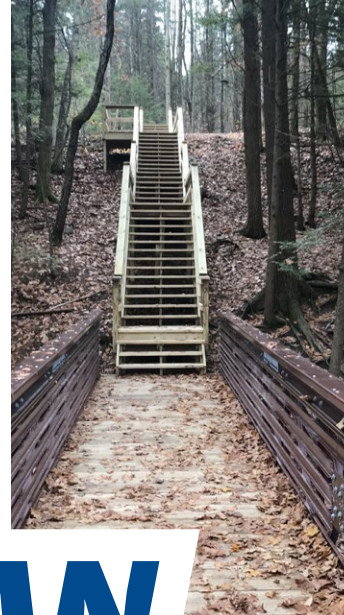

# READYSPAN

## LOCATION

Schenectady County, Rotterdam, NY

## TYPE

Pedestrian Bridge

## COMPLETION DATE

2019

## SPAN

50' - 0 x 6' - 0

## DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), and 35 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 2 ½"

Straight Ends

A307 Galvanized Bolts

Cambered On Site

PROForms® Fire Retardant Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [readyspan.com](http://readyspan.com) or call **814-623-8125**.





# READYSPAN

## LOCATION

Linda Lake - Charlotte, NC

## TYPE

Pedestrian Bridge

## COMPLETION DATE

2018

## SPAN

40' - 0 x 8' - 0

## DESIGN SPECIFICATIONS

Design load 100 PSF (Pedestrian) & 20 PSF (Wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4"

Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Standard Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [readyspan.com](http://readyspan.com) or call 814-623-8125.



# READYSPAN

## LOCATION

Cascade Locks, OR

## TYPE

Pedestrian Bridge

## COMPLETION DATE

2017

## SPAN

40' - 0 x 3' - 0

## DESIGN SPECIFICATIONS

Design Load - 90 psf (pedestrian), 50 psf (snow), and 20 psf (wind)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 9"

Straight Ends

A36 Galvanized Bolts

Pre-Cambered

PROForms® Standard Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets

Western Red Cedar Decking

Shipped Fully Assembled



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [readyspan.com](http://readyspan.com) or call **814-623-8125**.

READYSPAN





# READYSPAN

## LOCATION

Grandfather Mountain - Banner Elk, NC

## TYPE

Pedestrian Bridge

## COMPLETION DATE

2016

## SPAN

60' - 0 x 5' - 0

## DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), 35 psf (snow), and 25 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4"

Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Fire Retardant Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Truss Sections Shipped Assembled


Other Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [readyspan.com](http://readyspan.com) or call **814-623-8125**.

READYSPAN

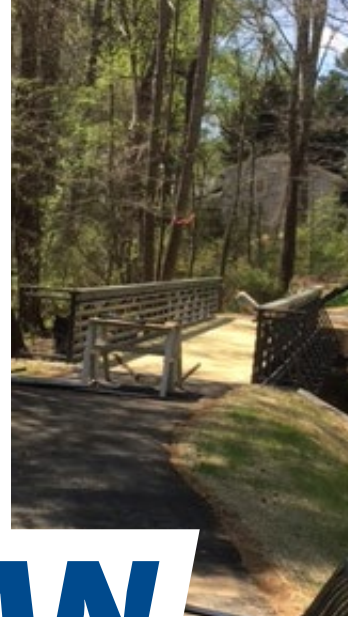

# READYSPAN

## LOCATION

Cross Ridge - Charlotte, NC

## TYPE

Pedestrian Bridge

## COMPLETION DATE

2016

## SPAN

50' - 0 x 8' - 0

## DESIGN SPECIFICATIONS

Design Load - 100 psf (pedestrian) and 20 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4"

Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Standard Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [readyspan.com](http://readyspan.com) or call **814-623-8125**.





# READYSPAN

## LOCATION

Cumberland Valley TWP, PA

## TYPE

Gangway

## COMPLETION DATE

2012

## SPAN

40' x 4'

## DESIGN SPECIFICATIONS

Total Load - 40 psf

Fiberglass Truss

Handrail 48" Above Decking

Straight Ends

A36 Galvanized Bolts

PROForms® Standard Polyester Resin System (Beige)

Galvanized Steel Mounting Brackets

PROForms® FRP Decking

Shipped Fully Assembled



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [readyspan.com](http://readyspan.com) or call 814-623-8125.

READYSPAN