



READYSPAN

LOCATION

Rocky Gap State Park — Flintstone, MD

TYPE

Pedestrian Bridge & Boardwalk

COMPLETION DATE

2022

DESIGN SPECIFICATIONS (bridge)

Length & Width: 40' - 0 x 5' - 0

Design Load - 85 psf (pedestrian), 38.5 psf (snow),
15.5 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 2 3/4",
Straight Ends

Hardware: A307 Galvanized

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly

DESIGN SPECIFICATIONS (boardwalks)

Length & Width

· 30' - 0 x 5' - 0 (with 10' - 0 max span)

· 130' - 0 x 5' - 0 (with 10' - 0 max span)

Design Load - 85 psf (pedestrian), 38.5 psf (snow),
15.5 psf (wind)

Fiberglass WF-Beam Supported By Helical Steel Piles

Handrail 42" Above Decking

Horizontal Midrails Spaced At Maximum 2 3/4",
Straight Ends

Hardware: A307 Galvanized

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets


#2 3' x 12' Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.

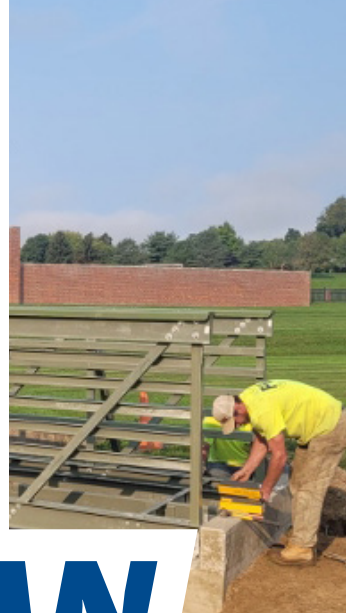

READYSPAN

LOCATION

Bucknell University — Lewisburg, PA

TYPE

Pedestrian Bridge

COMPLETION DATE

2022

SPAN

30' - 0 x 6' - 0

DESIGN SPECIFICATIONS

Design Load – 85 psf (pedestrian), 37.5 psf (snow), 17.6 psf (wind)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4", Straight Ends

Hardware: A307 Galvanized

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.



READYSPAN

LOCATION

Winding Walk HOA - Concord, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2021

SPAN

24' - 3" x 4' - 0

DESIGN SPECIFICATIONS

Design Load - 60 psf (pedestrian), 10 psf (snow)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 2 1/2"

Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

5/4 x 8 WearDeck Reinforced Polymeric Lumber

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.



READYSPAN

LOCATION

Winding Walk HOA - Concord, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2021

SPAN

16' - 0 x 4' - 0

DESIGN SPECIFICATIONS

Design Load - 60 psf (pedestrian), 10 psf (snow)

Fiberglass Beam Bridge

Handrail 42" Above Decking

Horizontal Midrails Spaced At Maximum 3 1/2"

Straight Ends

Galvanized Hardware

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

5/4 x 8 WearDeck Reinforced Polymeric Lumber

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.



READYSPAN

LOCATION

Martin Hill - Buchanan State Forest, Bedford County, PA

TYPE

Pedestrian Bridge

COMPLETION DATE

2020

SPAN

30' - 0 x 6' - 0

DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), 30 psf (snow), UTV (7,600lb per UTV, 3 total),
Equestrian 2,000lb per Horse, 5 total)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 3 9/16"

Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.



READYSPAN

LOCATION

Martin Hill - Buchanan State Forest, Bedford County, PA

TYPE

Pedestrian Bridge

COMPLETION DATE

2020

SPAN

26' - 0 x 6' - 0

DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), 30 psf (snow), UTV (7,600lb per UTV, 3 total),
Equestrian 2,000lb per Horse, 5 total)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 3 9/16"

Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.



READYSPAN

LOCATION

Schenectady County, Rotterdam, NY

TYPE

Pedestrian Bridge

COMPLETION DATE

2019

SPAN

50' - 0 x 6' - 0

DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), and 35 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 2 ½"

Straight Ends

A307 Galvanized Bolts

Cambered On Site

PROForms® Fire Retardant Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets


#2 3' x 12' Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.

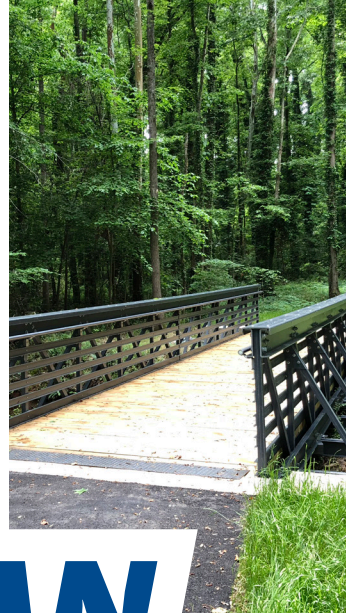

READYSPAN

LOCATION

Linda Lake - Charlotte, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2018

SPAN

40' - 0 x 8' - 0

DESIGN SPECIFICATIONS

Design load 100 PSF (Pedestrian) & 20 PSF (Wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4"

Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Standard Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.



READYSPAN

LOCATION

Cascade Locks, OR

TYPE

Pedestrian Bridge

COMPLETION DATE

2017

SPAN

40' - 0 x 3' - 0

DESIGN SPECIFICATIONS

Design Load - 90 psf (pedestrian), 50 psf (snow), and 20 psf (wind)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 9"

Straight Ends

A36 Galvanized Bolts

Pre-Cambered

PROForms® Standard Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets


Western Red Cedar Decking

Shipped Fully Assembled



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.

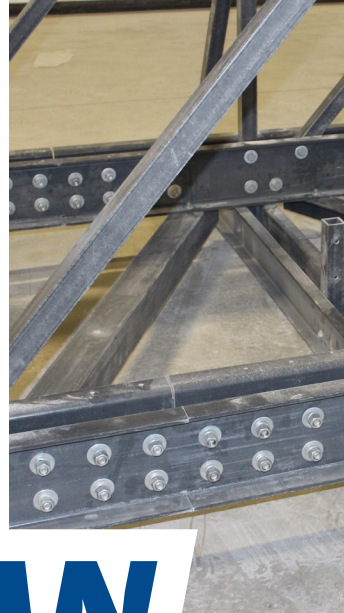

READYSPAN

LOCATION

Grandfather Mountain - Banner Elk, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2016

SPAN

60' - 0 x 5' - 0

DESIGN SPECIFICATIONS

Design Load - 85 psf (pedestrian), 35 psf (snow), and 25 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4"

Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Fire Retardant Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking


Truss Sections Shipped Assembled

Other Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call 814-623-8125.

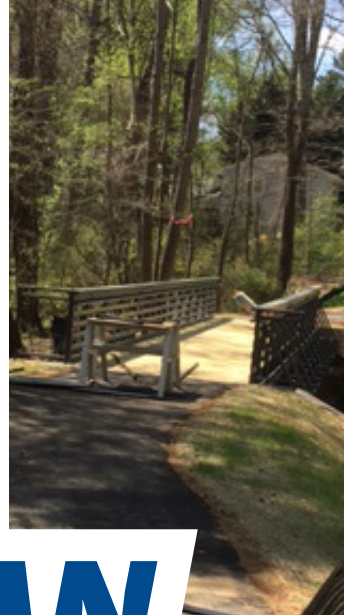

READYSPAN

LOCATION

Cross Ridge - Charlotte, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2016

SPAN

50' - 0 x 8' - 0

DESIGN SPECIFICATIONS

Design Load - 100 psf (pedestrian) and 20 psf (wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4"

Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Standard Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.



READYSPAN

LOCATION

Cumberland Valley TWP, PA

TYPE

Gangway

COMPLETION DATE

2012

SPAN

40' x 4'

DESIGN SPECIFICATIONS

Total Load – 40 psf

Fiberglass Truss

Handrail 48" Above Decking

Straight Ends

A36 Galvanized Bolts

PROForms® Standard Polyester Resin System (Beige)

Galvanized Steel Mounting Brackets

PROForms® FRP Decking

Shipped Fully Assembled



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at readyspan.com or call **814-623-8125**.