

READYSERIES

LOCATION

Rocky Gap State Park – Flintstone, MD

TYPE

Pedestrian Bridge and Boardwalk

COMPLETION DATE

2022

DESIGN SPECIFICATIONS (BRIDGE)

Length and Width: 40' x 5'
Design Load: 85 psf (Pedestrian),
38.5 psf (Snow) and 15.5 psf (Wind)
Fiberglass Truss
Handrail 42" Above Decking
Top Cap
Horizontal Midrails Spaced At Maximum 2-³/₄",
Straight Ends
A307 Galvanized Hardware
Cambered On Site
PROForms® Standard Polyester Resin
System (Green)
Galvanized Steel Mounting Brackets
#2 3' x 12' Southern Yellow Pine Decking
All Components Shipped Loose For
Field Assembly


DESIGN SPECIFICATIONS (BOARDWALKS)

Length and Width: 30' x 5' (10' Max Span)
130' x 5' (10' Max Span)
Design Load: 85 psf (Pedestrian),
38.5 psf (Snow) and 15.5 psf (Wind)
Fiberglass WF-Beam Supported By Helical
Steel Piles
Handrail 42" Above Decking
Horizontal Midrails Spaced At Maximum 2-³/₄",
Straight Ends
A307 Galvanized Hardware
PROForms® Standard Polyester Resin
System (Green)
Galvanized Steel Mounting Brackets
#2 3' x 12' Southern Yellow Pine Decking
All Components Shipped Loose For
Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.

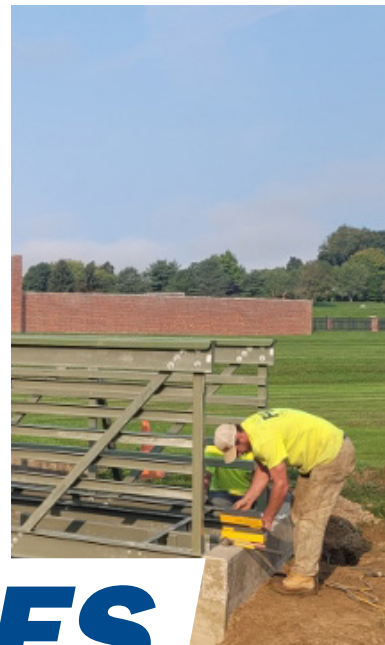

READYSERIES

LOCATION

Bucknell University – Lewisburg, PA

TYPE

Pedestrian Bridge

COMPLETION DATE

2022

SPAN

30' x 6'

DESIGN SPECIFICATIONS

Design Load: 85 psf (Pedestrian), 37.5 psf (Snow) and 17.6 psf (Wind)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4", Straight Ends

A307 Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.



READYSERIES

LOCATION

Winding Walk HOA – Concord, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2021

SPAN

24'-3" x 4'

DESIGN SPECIFICATIONS

Design Load: 60 psf (Pedestrian), 10 psf (Snow)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 2-½", Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

#5 4' x 8' WearDeck Reinforced Polymeric Lumber

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.



READYSERIES

LOCATION

Winding Walk HOA – Concord, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2021

SPAN

16' x 4'

DESIGN SPECIFICATIONS

Design Load: 60 psf (Pedestrian), 10 psf (Snow)

Fiberglass Beam Bridge

Handrail 42" Above Decking

Horizontal Midrails Spaced At Maximum 3-½", Straight Ends

Galvanized Hardware

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

#5 4' x 8' WearDeck Reinforced Polymeric Lumber

All Components Shipped Loose For Field Assembly




READYSERIES



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.

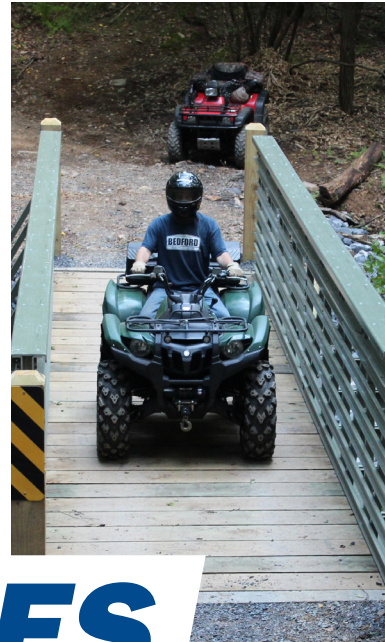

READYSERIES

LOCATION

Martin Hill — Buchanan State Forest, Bedford County, PA

TYPE

Pedestrian Bridge

COMPLETION DATE

2020

SPAN

30' x 6'

DESIGN SPECIFICATIONS

Design Load: 85 psf (Pedestrian), 30 psf (Snow), UTV (7,600lb per UTV, 3 total) and Equestrian (2,000 lb per Horse, 5 total)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 3- $\frac{9}{16}$ ", Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.



READYSERIES

LOCATION

Martin Hill — Buchanan State Forest, Bedford County, PA

TYPE

Pedestrian Bridge

COMPLETION DATE

2020

SPAN

26' x 6'

DESIGN SPECIFICATIONS

Design Load: 85 psf (Pedestrian), 30 psf (Snow), UTV (7,600lb per UTV, 3 total) and Equestrian (2,000 lb per Horse, 5 total)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 3- $\frac{9}{16}$ ", Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Green)

Galvanized Steel Mounting Brackets

Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.



READYSERIES

LOCATION

Forest District 13 – Elk State Forest, Emporium, PA

TYPE

Pedestrian Bridge

COMPLETION DATE

2019

SPAN

40' x 4'

DESIGN SPECIFICATIONS

Design Load: 85 psf (Pedestrian)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 3- $\frac{9}{16}$ ", Straight Ends

Galvanized Hardware

Cambered On Site

PROForms® Standard Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets

Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly



READYSERIES



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.



READYSERIES

LOCATION

Schenectady County, Rotterdam, NY

TYPE

Pedestrian Bridge

COMPLETION DATE

2019

SPAN

50' x 6'

DESIGN SPECIFICATIONS

Design Load: 85 psf (Pedestrian) and 35 psf (Wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 2-1/2", Straight Ends

A307 Galvanized Bolts

Cambered On Site

PROForms® Fire Retardant Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

All Components Shipped Loose For Field Assembly

B
|
READYSERIES



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.



READYSERIES

LOCATION

Linda Lake – Charlotte, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2018

SPAN

40' x 8'

DESIGN SPECIFICATIONS

Design Load: 100 psf (Pedestrian) and 20 psf (Wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4", Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Standard Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.



READYSERIES

LOCATION

Cascade Locks, OR

TYPE

Pedestrian Bridge

COMPLETION DATE

2017

SPAN

40' x 3'

DESIGN SPECIFICATIONS

Design Load: 90 psf (Pedestrian), 50 psf (Snow) and 20 psf (Wind)

Fiberglass Truss

Handrail 54" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 9", Straight Ends

A36 Galvanized Bolts

Pre-Cambered

PROForms® Standard Polyester Resin System (Brown)

Galvanized Steel Mounting Brackets

Western Red Cedar Decking


Shipped Fully Assembled


READYSERIES



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at ready-series.com or call **814-338-4057**.

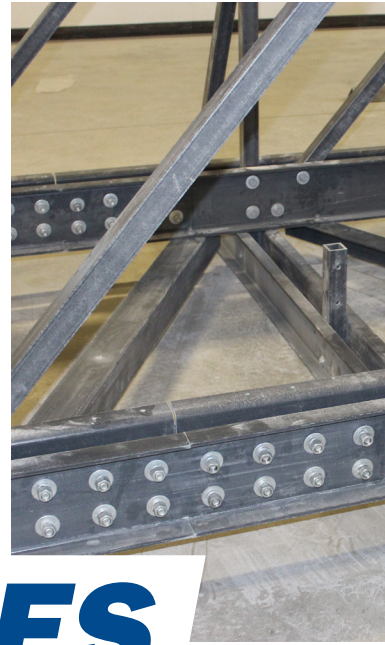

READYSERIES

LOCATION

Grandfather Mountain – Banner Elk, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2016

SPAN

60' x 5'

DESIGN SPECIFICATIONS

Design Load: 85 psf (Pedestrian), 35 psf (Snow) and 25 psf (Wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4", Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Fire Retardant Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Truss Sections Shipped Assembled

Other Components Shipped Loose For Field Assembly



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at ready-series.com or call **814-338-4057**.



READYSERIES

LOCATION

Cross Ridge – Charlotte, NC

TYPE

Pedestrian Bridge

COMPLETION DATE

2016

SPAN

50' x 8'

DESIGN SPECIFICATIONS

Design Load: 100 psf (Pedestrian) and 20 psf (Wind)

Fiberglass Truss

Handrail 42" Above Decking

Top Cap

Horizontal Midrails Spaced At Maximum 4", Straight Ends

A36 Galvanized Bolts

Cambered On Site

PROForms® Standard Polyester Resin System (Dark Gray)

Galvanized Steel Mounting Brackets

#2 3' x 12' Southern Yellow Pine Decking

Shipped Loose For Field Assembly



READYSERIES



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at [ready-series.com](https://www.ready-series.com) or call **814-338-4057**.



READYSERIES

LOCATION

Cumberland Valley TWP, PA

TYPE

Gangway

COMPLETION DATE

2012

SPAN

40' x 4'

DESIGN SPECIFICATIONS

Total Load: 40 psf

Fiberglass Truss

Handrail 48" Above Decking, Straight Ends

A36 Galvanized Bolts

PROForms® Standard Polyester Resin System (Beige)

Galvanized Steel Mounting Brackets

PROForms® FRP Decking

Shipped Fully Assembled

B
|
READYSERIES



ONE CORPORATE DRIVE, SUITE 106, BEDFORD, PA 15522 USA

Request a quote at ready-series.com or call **814-338-4057**.